

HPLC Application

ID No.: 15520

Energy Drink Components on Onyx C18 at 1.0mL/min.

Column: Onyx™ Monolithic C18, LC Column 50 x 4.6 mm, Ea

Dimensions: 50 x 4.6 mm ID

Order No: CH0-7644

Elution Type: Isocratic

Eluent A: 10mM Potassium phosphate, pH 5.0

Eluent B: Acetonitrile

Gradient Profile:	Step No.	Time (min)	Pct A	Pct B
	1	0	97	3


Flow Rate: 1 mL/min

Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 220 nm (ambient)
15520



Products used in this application:

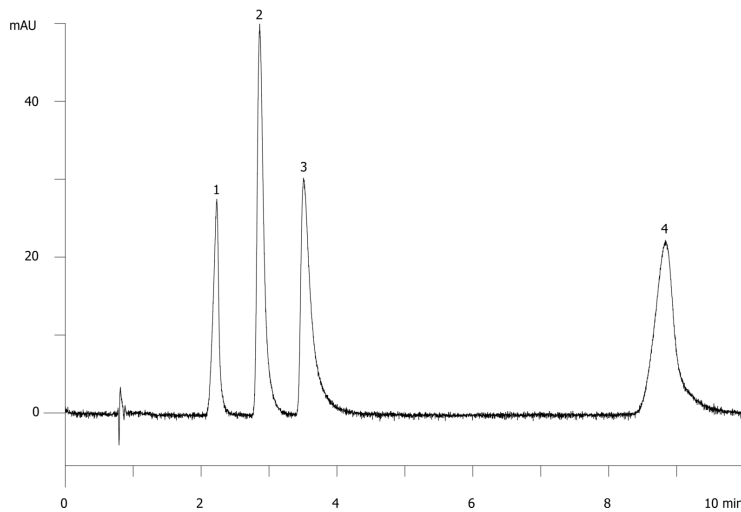

ANALYTES:

- 1** p-Hydroxybenzoic acid
Retention Time: 2.228 min
- 2** Saccharin
Retention Time: 2.86 min
- 3** Salicylic acid
Retention Time: 3.509 min
- 4** Sorbic acid
Retention Time: 8.84 min
- 5** p-Toluic acid
Retention Time: 19.334 min

