GC Application




PCP on ZB5ms 20x0.18x0.18

Column: Phase: Dimensions: Order No: Oven Profile:	Zebron [™] ZB-5MS, GC Cap. Column 20 m x 0.18 mm x 0.18 µm, Ea 5% Phenyl-Arylene 95% Dimethylpolysiloxane 20 meters x 0.18 mm x 0.18 µm 7FD-G010-08 90°C to 220°C at 25°C/min to 250°C at 10°C/min to 280°C at 25°C/min for 2 min
Carrier Gas: Injection: Detection: ¹⁵⁵⁶⁶	Constant Flow Helium, 1.1 mL/min split 20:1 1 µL @ 250°C Mass Selective (MSD) (180°C)



Products used in this application:



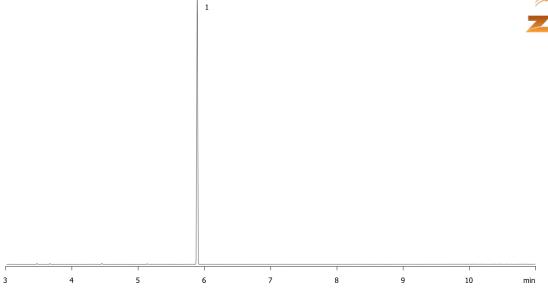

ANALYTES:

1 PCP

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com

For more information contact your Phenomenex Representative at support@phenomenex.com