

GC Application

ID No.: 16057

Diesel Fuel under H53 on ZB-5HT 30x0.25x0.10

Column: Zebtron™ ZB-5HT, GC Cap. Column 30 m x 0.25 mm x 0.10 μm, Ea

Phase: 5% Phenyl 95% Dimethylpolysiloxane

Dimensions: 30 meters x 0.25 mm x 0.1 μm

Order No: 7HG-G015-02

Oven Profile: 50°C for 6 min to 400°C at 20°C/min for 15 min

Carrier Gas: Constant Flow Helium, 1.3 mL/min

Injection: On-Column :1 0.1 μL @ 53°C

Detection: Flame Ionization (FID) (400°C)


Analyst Note: Fuel was 10mg/mL in dichloromethane with 50ppm markers



Products used in this application:



16057

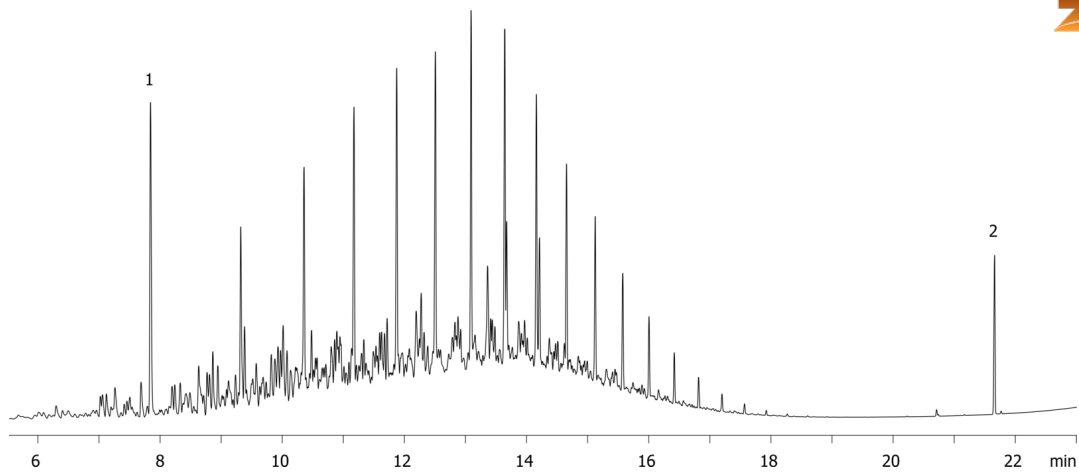

ANALYTES:

- 1 Decane (C10)
- 2 Tetracontane (C40)

