

## Silicone Caulk Extract on ZB-5HT

**Column:** Zebtron™ ZB-5HT, GC Cap. Column 15 m x 0.32 mm x 0.10 μm, Ea

**Phase:** 5% Phenyl 95% Dimethylpolysiloxane

**Dimensions:** 15 meters x 0.32 mm x 0.1 μm

**Order No:** 7EM-G015-02

**Oven Profile:** 60°C to 400°C at 25°C/min for 10min

**Carrier Gas:** Constant Flow Helium, 2.9 mL/min

**Injection:** On-Column :1 0.1 μL @ 63°C


**Detection:** Flame Ionization (FID) (425°C)

**Analyst Note:** Cured clear silicone caulk extracted with carbon disulfide.

16123



Products used in this application:

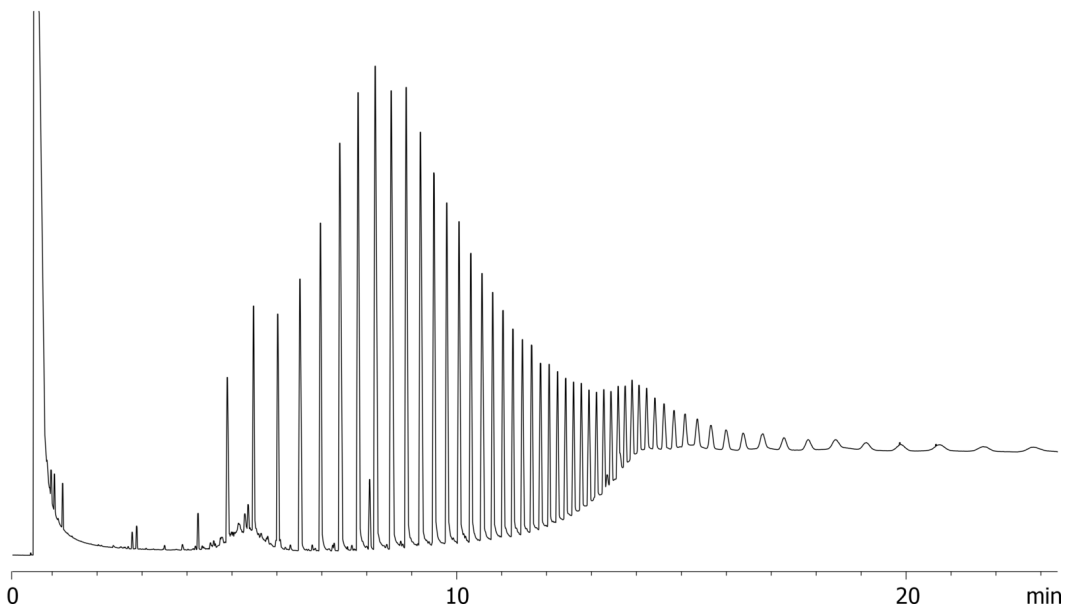

### ANALYTES:

- 1 Silicone extract

