

GC Application

ID No.: 16180

Aroclor 1260: DIN 51527 on ZB-MR2

Column: Zebtron[™] ZB-MultiResidue[™]-2, GC Cap. Column 30 m x 0.32 mm x 0.25 μm, Ea

Phase:

Dimensions: 30 meters x 0.32 mm x 0.25 μm

Order No: 7HM-G017-11

Oven Profile: 100 °C for 0.5 min to 200 °C at 25 °C/min to 320 °C at 6 °C/min for 2 min

Carrier Gas: Constant Flow Helium, 1.5 mL/min


Injection: Splitless :1 1 μL @ 250°C

Detection: Electron Capture (ECD) (350°C)

16180



Products used in this application:

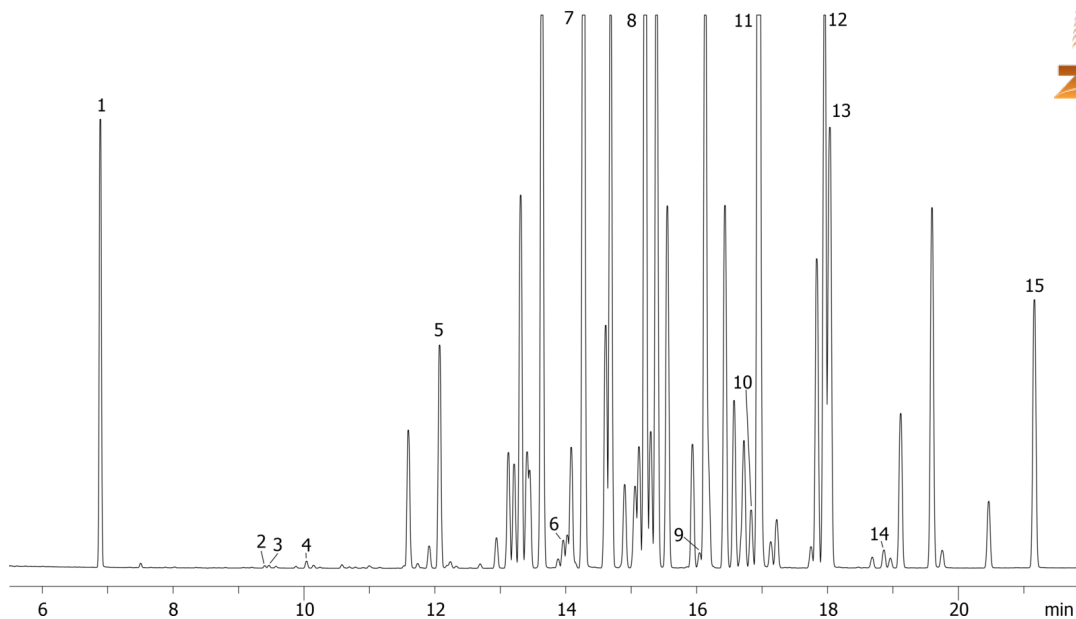

Aroclor 1260: DIN 51527 on ZB-MR2

ANALYTES:

- 1 TCMX
- 2 BZ# 31
- 3 BZ# 28
- 4 BZ# 52
- 5 BZ# 101
- 6 BZ# 118
- 7 BZ# 153
- 8 BZ# 138
- 9 BZ# 167
- 10 BZ# 156
- 11 BZ# 180
- 12 BZ# 170
- 13 BZ# 169
- 14 BZ# 189
- 15 DCB

