

## ASTM Method D3798: Analysis of p-Xylene on ZB-WAX

**Column:** Zebron<sup>™</sup> ZB-WAX, GC Cap. Column 30 m x 0.25 mm x 0.50 µm, Ea

**Phase:** Polyethylene Glycol (PEG)

**Dimensions:** 30 meters x 0.25 mm x 0.5 µm

**Order No:** 7HG-G007-17


**Oven Profile:** 75 °C to 90 °C at ramp 3 °C/min. hold for 5 min.

**Carrier Gas:** Constant Flow Helium, 1.3 mL/min

**Injection:** Split 100:1 0.1 µL @ 220°C

**Detection:** Flame Ionization (FID) (250°C)

16219

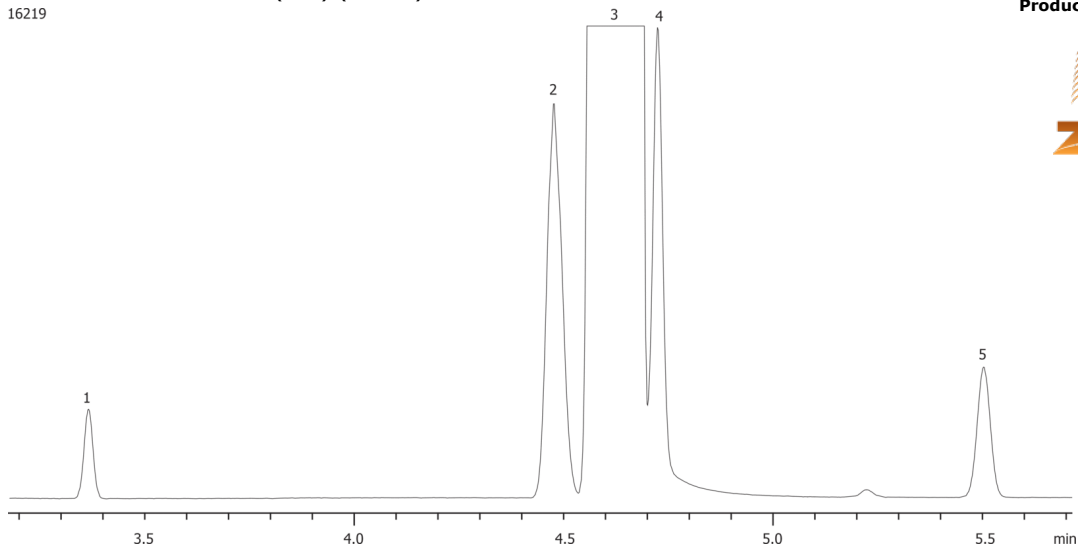

Products used in this application:



### ANALYTES:

- 1 Toluene
- 2 Ethylbenzene
- 3 p-Xylene
- 4 m-Xylene
- 5 o-Xylene

