

USP 467 Procedure B - Class 2 Mix A by GC/FID on ZB-WAXplus

Column: Zebtron[™] ZB-WAXplus[™], GC Cap. Column 30 m x 0.32 mm x 0.25 μ m, Ea

Phase: Polyethylene Glycol (PEG)

Dimensions: 30 meters x 0.32 mm x 0.25 μ m

Order No: 7HM-G013-11

Oven Profile: 50 °C for 20 min to 165 °C @ 6 °C/min for 20 min

Carrier Gas: Constant Flow Helium, 35 cm/sec


Injection: Headspace 5:1 1 μ L @ 140°C

Detection: Flame Ionization (FID) (250°C)

Analyst Note: Sample prepared as per USP Method



Products used in this application:

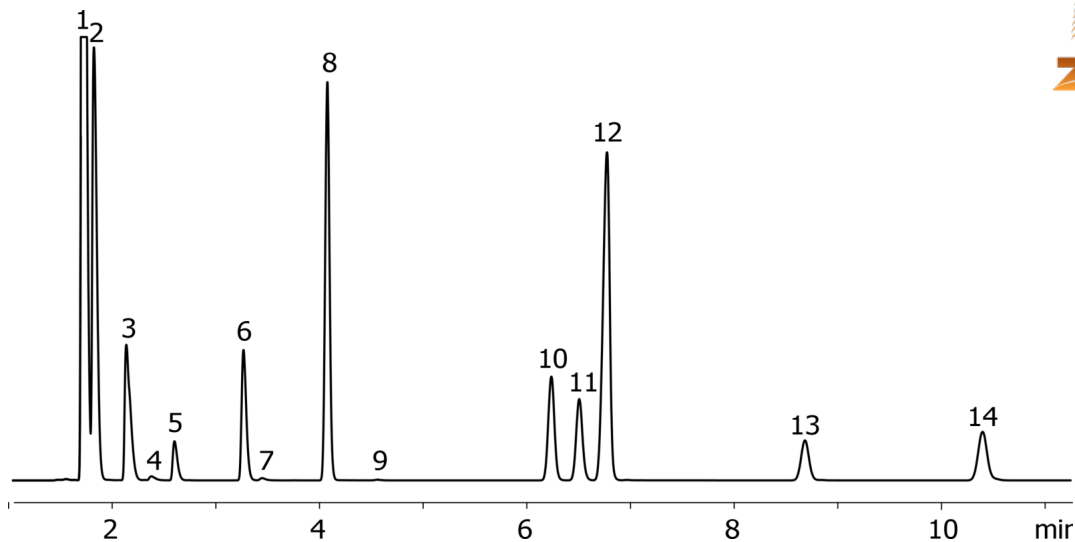

USP 467 Procedure B - Class 2 Mix A by GC/FID on ZB-WAXplus

ANALYTES:

- 1 Cyclohexane
- 2 Methylcyclohexane
- 3 Tetrahydrofuran
- 4 Methanol
- 5 Dichloromethane
- 6 cis-1,2-Dichloroethene
- 7 Acetonitrile
- 8 Toluene
- 9 1,4-Dioxane
- 10 Ethylbenzene
- 11 p-Xylene
- 12 m-Xylene
- 13 o-Xylene
- 14 Chlorobenzene

