

USP 467 Procedure B - Class 2 Mix B by GC/FID on ZB-WAXplus

Column: Zebtron™ ZB-WAXplus™, GC Cap. Column 30 m x 0.32 mm x 0.25 µm, Ea

Phase: Polyethylene Glycol (PEG)

Dimensions: 30 meters x 0.32 mm x 0.25 µm

Order No: 7HM-G013-11

Oven Profile: 50 °C for 20 min to 165 °C @ 6 °C/min for 20 min

Carrier Gas: Constant Flow Helium, 35 cm/sec


Injection: Headspace 5:1 1 µL @ 140°C

Detection: Flame Ionization (FID) (250°C)

Analyst Note: Sample prepared as per USP Method



Products used in this application:

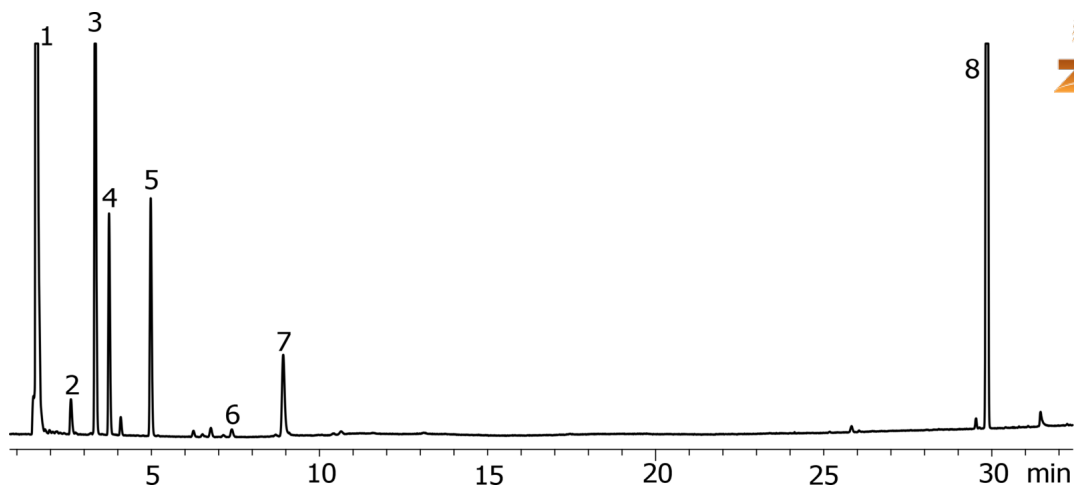

ANALYTES:

- 1 Hexane
- 2 1,2-Dimethoxyethane
- 3 Trichloroethylene
- 4 Chloroform
- 5 Methyl butyl ketone
- 6 Nitromethane
- 7 Pyridine
- 8 Tetralin

