

GC Application

ID No.: 18178

Aroclor 1260: DIN 51527 on ZB-XLB-HT

Column: Zebtron[™] ZB-XLB-HT, GC Cap. Column 30 m x 0.25 mm x 0.25 μm, Ea

Phase: Proprietary XLB Phase

Dimensions: 30 meters x 0.25 mm x 0.25 μm

Order No: 7HG-G024-11

Oven Profile: 50 °C for 0.5 min to 210 °C @ 40 °C/min for 3 min to 230 °C @ 30 °C/min for 5 min to 250 °C @ 30 °C/min for 5 min to 320 °C @ 40 °C/min

Carrier Gas: Constant Flow Helium, 1.5 mL/min

Injection: Split 2:1 1 μL @ 250°C

Detection: Electron Capture (ECD) (350°C)

Detector Info: Pressure pulse used at 40 psi for first 0.25 min


Analyst Note: Total concentration of Aroclors was 90 ppm in iso-octane



Products used in this application:



18178

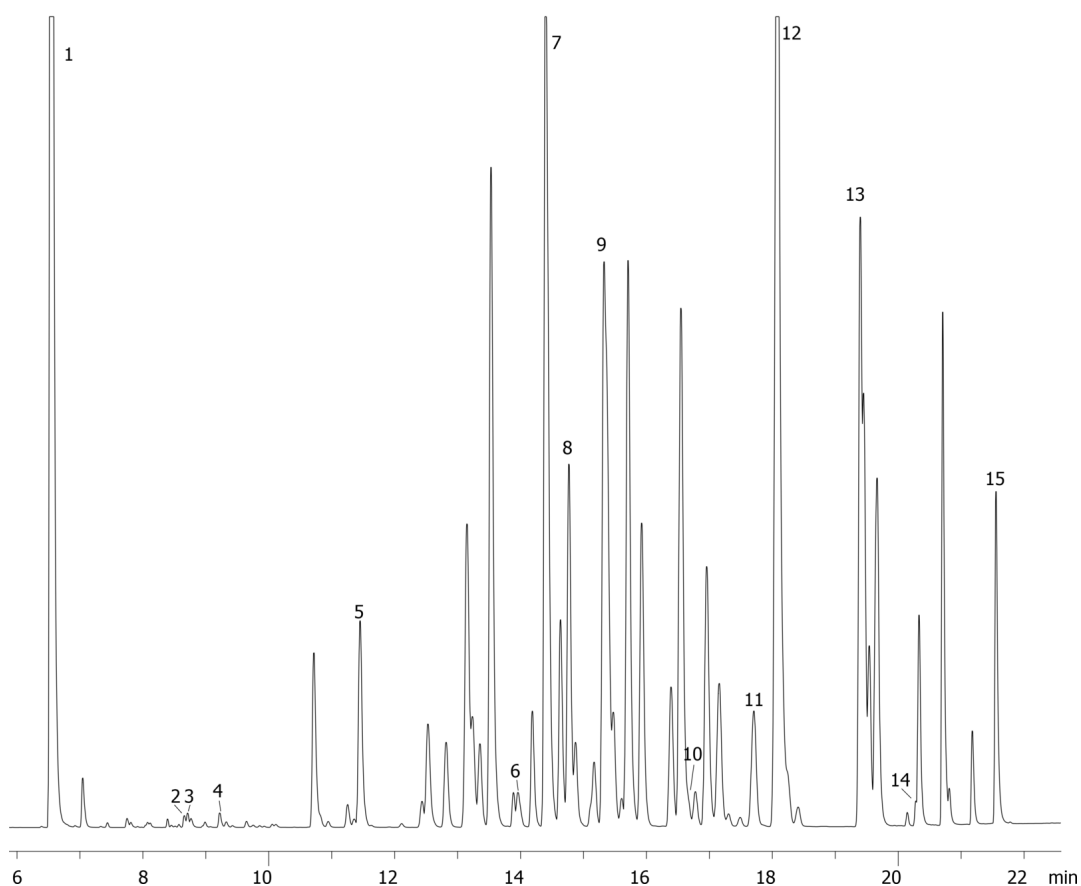

Aroclor 1260: DIN 51527 on ZB-XLB-HT

ANALYTES:

- 1 TCMX
- 2 BZ# 31
- 3 BZ# 28
- 4 BZ# 52
- 5 BZ# 101
- 6 BZ# 118
- 7 BZ# 153
- 8 BZ# 105
- 9 BZ# 138
- 10 BZ# 167
- 11 BZ# 156
- 12 BZ# 180
- 13 BZ# 170
- 14 BZ# 189
- 15 DCB

