

## FMOC-DL-Isoleucine-(boc)-OH on Lux 5 µm Cellulose-2 250 x 4.6mm in NP

**Column:** Lux® 5 µm Cellulose-2, LC Column 250 x 4.6 mm, Ea

**Dimensions:** 250 x 4.6 mm ID

**Order No:** 00G-4457-E0

**Elution Type:** Isocratic

**Eluent A:** 0.1 % Formic acid in Hexane

**Eluent B:** 0.1% Formic acid in IPA

Gradient Profile:	Step No.	Time (min)	Pct A	Pct B
	1	15	80	20

**Flow Rate:** 1 mL/min

**Col. Temp.:** ambient

**Detection:** UV-Vis Abs.-Variable Wave.(UV) @ 254 nm (ambient)

**Analyst Note:** SecurityGuard™ Guard Cartridge System extends column lifetime.

- SecurityGuard Cartridges, Lux Cellulose-2, 4 x 3.0mm ID, 10/Pk Part No.: AJ0-8366


- Holder Part No.: KJ0-4282



Products used in this application:



18727

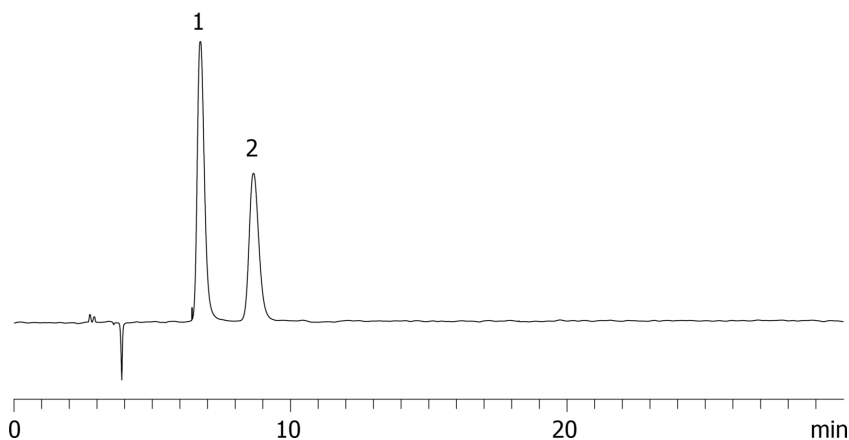

### ANALYTES:

- 1** FMOC-Ile-OH  
Retention Time: 6.7 min
- 2** FMOC-Ile-OH  
Retention Time: 8.6 min