

HPLC Application

ID No.: 18736

FMOC-DL-Proline-(boc)-OH on Lux 5 µm Cellulose-2 250 x 4.6mm in NP

Column: Lux[®] 5 µm Cellulose-2, LC Column 250 x 4.6 mm, Ea

Dimensions: 250 x 4.6 mm ID

Order No: 00G-4457-E0

Elution Type: Isocratic

Eluent A: 0.1% TFA in Hexane

Eluent B: 0.1% TFA in IPA

| Gradient Profile: | Step No. | Time (min) | Pct A | Pct B |
|-------------------|----------|------------|-------|-------|
| | 1 | 15 | 60 | 40 |

Flow Rate: 1 mL/min

Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 254 nm (ambient)

Analyst Note: SecurityGuard[™] Guard Cartridge System extends column lifetime.

- SecurityGuard Cartridges, Lux Cellulose-2, 4 x 3.0mm ID, 10/Pk Part No.: AJ0-8366


- Holder Part No.: KJ0-4282



Products used in this application:



18736

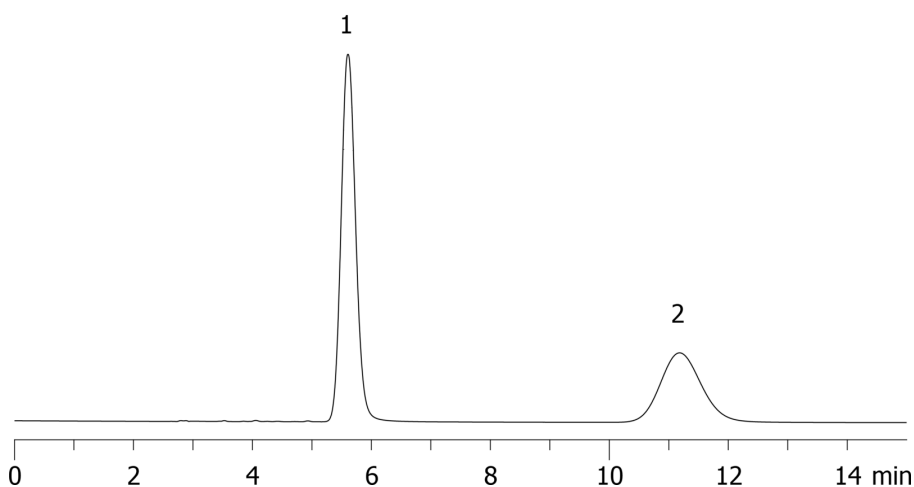

ANALYTES:

1 FMOC-Pro-OH

Retention Time: 5.6 min

2 FMOC-Pro-OH

Retention Time: 11.2 min

