

GC Application

ID No.: 19250

PolyWAX 850 on ZB-1XT SimDist 5x0.53x0.09

Column: Zebtron[™] ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.09 µm, Ea

Phase: 100% Dimethylpolysiloxane

Dimensions: 5 meters x 0.53 mm x 0.09 µm

Order No: 7AK-G026-55

Oven Profile: 50 °C to 430 °C @ 10 °C/min for 20 min.

Carrier Gas: Constant Flow Helium, 29 mL/min

Injection: On-Column :1 1 µL @ 53°C

Detection: Flame Ionization (FID) (450°C)


Analyst Note: This chromatogram has been baseline subtracted. Sample was 1mg/mL in Carbon Disulfide.



Products used in this application:



19250

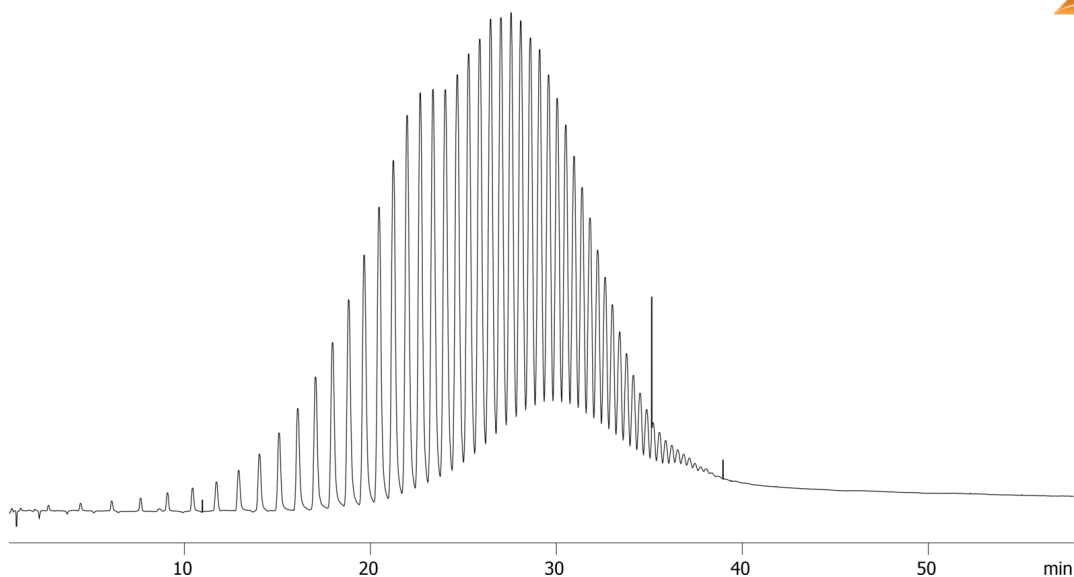

ANALYTES:

- 1 PolyWAX 850

