

Siloxane Polymers on ZB-1XT SimDist 5x0.53x0.09

Column: Zebron[™] ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.09 µm, Ea
Phase: 100% Dimethylpolysiloxane
Dimensions: 5 meters x 0.53 mm x 0.09 µm
Order No: 7AK-G026-55
Oven Profile: 35 °C to 430 °C @ 10 °C/min for 20 min.


Carrier Gas: Constant Flow Helium, 15 mL/min

Injection: On-Column :1 1 µL @ 53°C

Detection: Flame Ionization (FID) (450°C)

Analyst Note: This chromatogram has been baseline subtracted. Sample was silicone caulk dissolved in CS₂.

19253

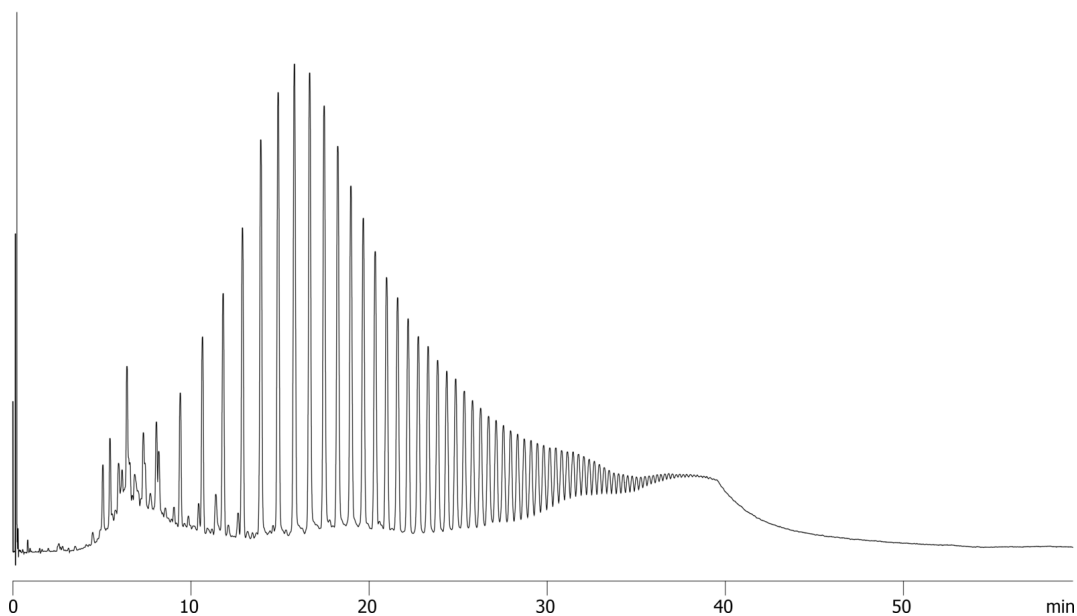

Products used in this application:



ANALYTES:

- 1 Siloxane polymers

