

# GC Application

ID No.: 19259

## PolyWAX 655 on ZB-1XT 5x0.53x0.15

**Column:** Zebron<sup>™</sup> ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.15 µm, Ea

**Phase:** 100% Dimethylpolysiloxane

**Dimensions:** 5 meters x 0.53 mm x 0.15 µm

**Order No:** 7AK-G026-05

**Oven Profile:** 35 °C to 450 °C @ 15 °C/min for 10 min

**Carrier Gas:** Constant Flow Helium, 15 mL/min

**Injection:** On-Column :1 1 µL @ 38°C

**Detection:** Flame Ionization (FID) (450°C)


**Analyst Note:** Sample was 0.1% in CS<sub>2</sub>. Chromatogram is baseline subtracted.



Products used in this application:



19259

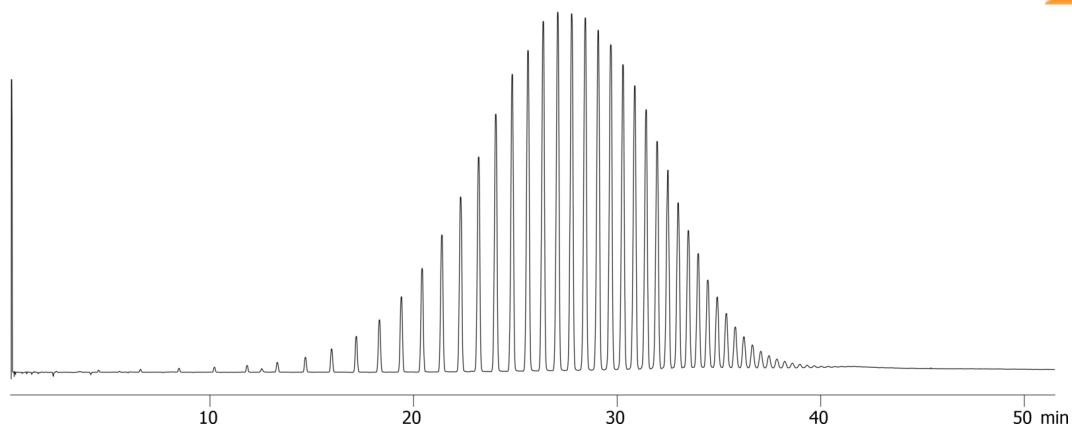

### ANALYTES:

- 1 PolyWAX 655

