

GC Application

ID No.: 19264

ASTM D7169 (Hydrocarbons C7-C100+) on ZB-1XT 5x0.53x0.15

Column: Zebtron[™] ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.15 µm, Ea

Phase: 100% Dimethylpolysiloxane

Dimensions: 5 meters x 0.53 mm x 0.15 µm

Order No: 7AK-G026-05

Oven Profile: 30 °C to 450 °C @ 10 °C/min for 10 min

Carrier Gas: Constant Flow Helium, 7 mL/min

Injection: On-Column :1 1 µL @ 33°C

Detection: Flame Ionization (FID) (450°C)


Analyst Note: Sample in CS2. Chromatogram is baseline subtracted.



Products used in this application:



19264

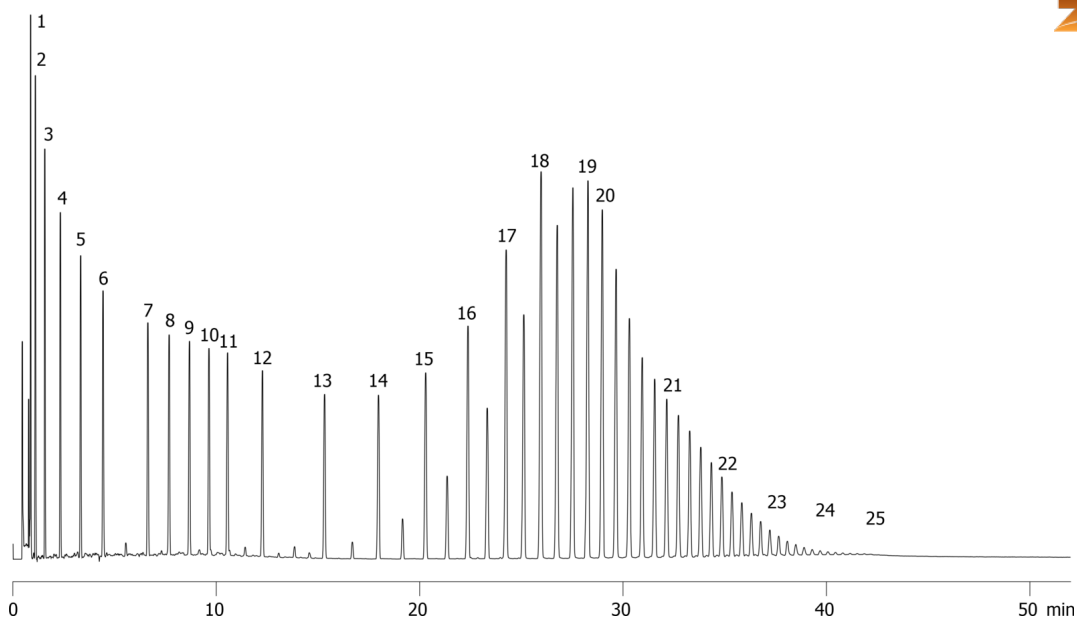

ASTM D7169 (Hydrocarbons C7-C100+) on ZB-1XT 5x0.53x0.15

ANALYTES:

- 1 Heptane (C7)
- 2 Octane (C8)
- 3 Nonane (C9)
- 4 Decane (C10)
- 5 Undecane (C11)
- 6 Dodecane (C12)
- 7 Tetradecane (C14)
- 8 Pentadecane (C15)
- 9 Hexadecane (C16)
- 10 Heptadecane (C17)
- 11 Octadecane (C18)
- 12 Eicosane (C20)
- 13 Tetracosane (C24)
- 14 Octacosane (C28)
- 15 Dotriacontane (C32)
- 16 Hexatriacontane (C36)
- 17 Tetracontane (C40)
- 18 Tetratetracontane (C44)
- 19 Pentacontane (C50)
- 20 Dopentacontane (C52)
- 21 Hexacontane (C60)
- 22 Heptacontane (C70)
- 23 Octacontane (C80)
- 24 Nonacontane (C90)
- 25 Hectane (C100)

