HPLC ApplicationID No.: **20929**



T3/T4 Plasma Extract by LC/MS/MS on Kinetex C18, 2.6 um, 75x2.1 mm

Kinetex® 2.6 μ m C18 100 Å, LC Column 75 x 2.1 mm, Ea

75 x 2.1 mm ID **Dimensions:** Order No: 00C-4462-AN Elution Type: Gradient

Eluent A: 0.05% Formic Acid in DI H2O

50:50 MeOH:ACN Eluent B:

Gradient	Step No.	Time (min)	Pct A	Pct B
Profile:	1	0	70	30
	2	2.5	30	70
	3	3	30	70
	4	3.01	10	90
	5	4	10	90
	6	4.01	70	30
	7	5.5	70	30




Products used in this application:



Flow Rate: 600 mL/min Col. Temp.: ambient

Detection: Mass Spectrometer (MS) @ amu (ambient)

Detector Info: <a target="_blank"

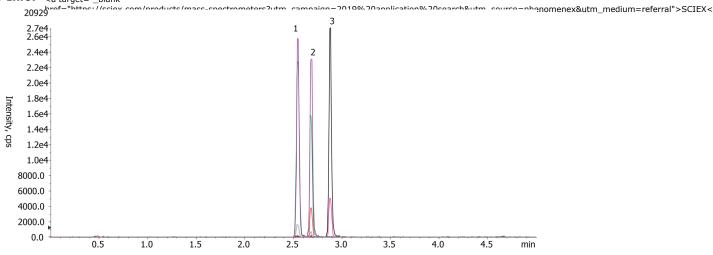

ANALYTES:

Т3

Retention Time: 2.54 min

Rev T3

Retention Time: 2.68 min

3 T4

Retention Time: 2.88 min

@2025 Phenomenex Inc. All rights reserved.

For more information contact your Phenomenex Representative at support@phenomenex.com



Sample Preparation Details

for HPLC Application ID No.: 20929



T3/T4 Plasma Extract by LC/MS/MS on Kinetex C18, 2.6 um, 75x2.1 mm

PRODUCT DESCRIPTION:

Strata™-X-C 33 µm Polymeric Strong Cation, 60 mg / 3 mL, Tubes , 50/Pk

Order No.: 8B-S029-UBJ

SOLID PHASE EXTRACTION (SPE) PRODCEDURE:

Note: The solvent volumes shown below are for a 60 mg bed mass.

The solvent volumes will need to be adjusted for a smaller or larger bed mass.

Condition:				
Load:				
Wash:				
Dry:				
5 min under max vac				
Elute:				
Final Prep and Analysis:				
Inject: 40 μL on HPLC Mass Spectrometer (MS) @ amu (ambient)				

ANALYTES:	Spiked Conc.	Log P	pKa	% Rec	%RSC
	(ng/mL)				(n=0)
1 T3	1				
2 Rev T3	1				
3 T4	1				

This method is designed as a convenient starting point for further investigation and can be tailored to meet your extraction goals. Call your local Phenomenex Representative for assistance in method development and optimization techniques.

©2025 Phenomenex Inc. All rights reserved.

For more information contact your Phenomenex Representative at support@phenomenex.com

