

HPLC Application

ID No.: 22611

Polystyrene MW Standard on Phenogel 5u 50A with SecurityGuard

Column: Phenogel™ 5 µm 50A, LC Column 300 x 7.8 mm, Ea

Dimensions: 300 x 7.8 mm ID

Order No: 00H-0441-K0

Elution Type: Isocratic

Eluent A: THF

Gradient	Step No.	Time (min)	Pct A
Profile:	1	0	100

Flow Rate: 1 mL/min


Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 254 nm (ambient)

22611



Products used in this application:

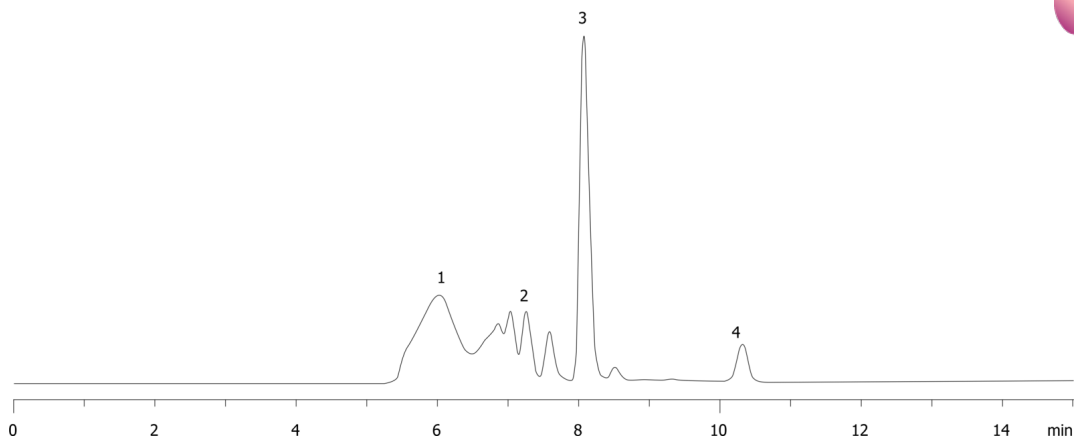

ANALYTES:

- 1 2400 Da
- 2 1490 Da
- 3 545 Da
- 4 162 Da

