
GC Application



Paraffin Marker Standards on ZB-DHA-PONA 100m x 0.25mm x 0.5um

Column: Phase: Dimensions:	Zebron ZB-DHA-PONA, GC Cap. Column 100m x 0.25mm x 0.5um , Ea 100 meters x 0.25 mm x 0.5 μm	Careford Control of Co
Order No: Oven Profile:	7MG-G042-17 35°C for 14 min to 60°C @ 1.1°C/min 60°C for 19 min to 280°C @ 2°C/min 280°C for 5 min	Froducts used in this application:
Carrier Gas: Injection: Detection: Analyst Note:	Constant Flow Helium, 1.55 mL/min Split 40:1 0.2 µL @ 300°C GC/FID (320°C) The pariffins standard was first diluted 100:1 in pentane and then run with a 40:1 split to avoid column	

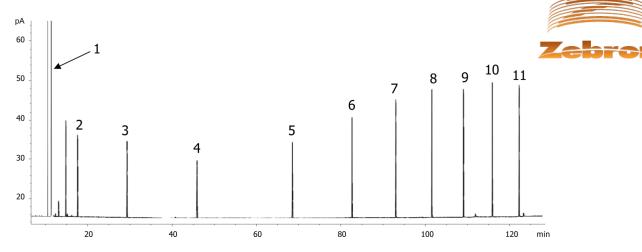

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com

For more information contact your Phenomenex Representative at support@phenomenex.com

GC Application ID No.: 25306



Paraffin Marker Standards on ZB-DHA-PONA 100m x 0.25mm x 0.5um

ANALYTES:

- 1 Pentane
- 2 Hexane
- 3 Heptane
- Octane 4
- 5 Nonane
- 6 Decane
- 7 Undecane
- 8 Dodecane
- 9 Tridecane
- 10 Tetradecane
- 11 Pentadecane

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com

For more information contact your Phenomenex Representative at support@phenomenex.com