


## Test Conditions for Zebron ZB-35

**Column:** Zebron<sup>™</sup> ZB-35, GC Cap. Column 30 m x 0.25 mm x 0.25  $\mu$ m, Ea  
**Phase:** 35% Phenyl 65% Dimethylpolysiloxane  
**Dimensions:** 30 meters x 0.25 mm x 0.25  $\mu$ m  
**Order No:** 7HG-G003-11  
**Oven Profile:** 140°C Isothermal

**Carrier Gas:** Hydrogen, 1.18 mL/min  
**Injection:** Split 100:1 0  $\mu$ L @ 250°C  
**Detection:** Flame Ionization (FID) (325°C)



Products used in this application:

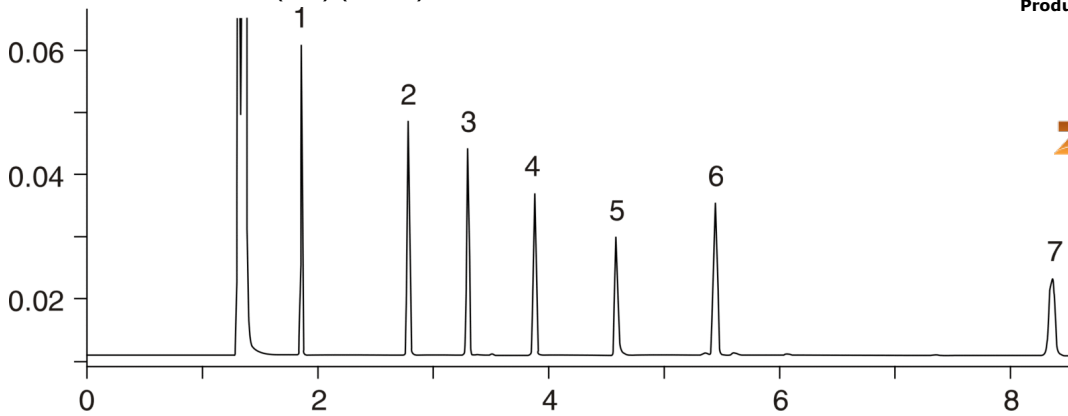

### ANALYTES:

- 1 Undecane
- 2 2,4-Dimethylphenol
- 3 2,6-Dimethylaniline
- 4 Tetradecane
- 5 1-Undecanol
- 6 1-Methylnaphthalene
- 7 Hexadecane (C16)

