HPLC Application

Phenolic Resins


Column:	Phenogel™ 5 µm 500A, LC Column 300 x 7.8 mm, Ea			
	Thenoger 5 µm 500Å, Le column 500 Å 7.0 mm, La			
Dimensions:	300 x 7.8 mm ID			
Order No:	00H-0443-K0			
Elution Type:	Isocratic			
Eluent A:	Tetrahydrofuran			
Gradient	Step No.	Time (min)	Pct A	
Profile:	1	0	100	
Flow Rate:	1 mL/min			
Col. Temp.:	25 °C			
Detection:	Refractive Index (RI) @ nm (ambient)			
Analyst Note:	4 Phenogel 5 μ columns (300 x 7.8mm ID) placed in series as follows: 500Å (x2), 10^3Å, 10^4Å.			
	Δ			



Ophenomenex

Products used in this application:



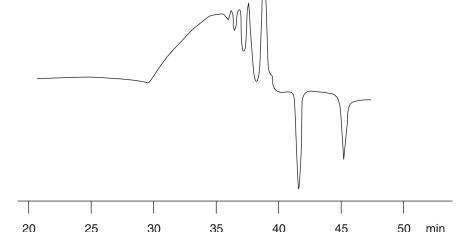

ANALYTES:

1 Phenolic aldehyde resin

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com

For more information contact your Phenomenex Representative at support@phenomenex.com