

# HPLC Application

ID No.: 5435

## Polystyrenes (Wide MW Range)

**Column:** Phenogel<sup>™</sup> 10 µm 10E5A, LC Column 300 x 7.8 mm, Ea

**Dimensions:** 300 x 7.8 mm ID

**Order No:** 00H-0646-K0

**Elution Type:** Isocratic

**Eluent A:** Tetrahydrofuran

Gradient	Step No.	Time (min)	Pct A
<b>Profile:</b>	<b>1</b>	0	100

**Flow Rate:** 1 mL/min


**Col. Temp.:** ambient

**Detection:** Differential refractometer @ nm (ambient)

**Analyst Note:** 3 Phenogel 10µ columns (300 x 7.8mm ID) placed in series as follows: 10<sup>^</sup>5Å, 10<sup>^</sup>4Å, 10<sup>^</sup>3Å.



Products used in this application:

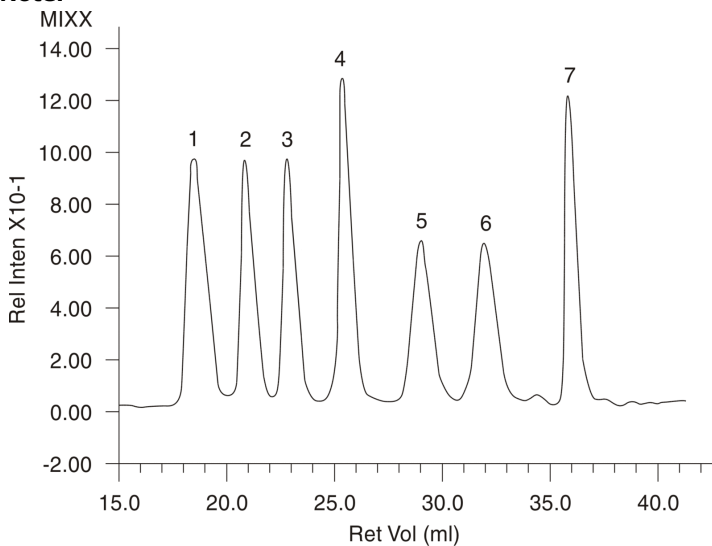

### ANALYTES:

- 1 1,560,000 MW
- 2 260,000 MW
- 3 94,000 MW
- 4 30,000 MW
- 5 6,100 MW
- 6 845 MW
- 7 146 MW

